


# Project Profile

## Drain Trough Sealing



The drain troughs at this Atlantic City casino had attracted the eye of the health inspector due to water pumping from under the tile when stepped on. The tile was being replaced approximately every 6 months and water was finding its way through the floor and onto the casino below. The casino could not find a long term solution to this problem.

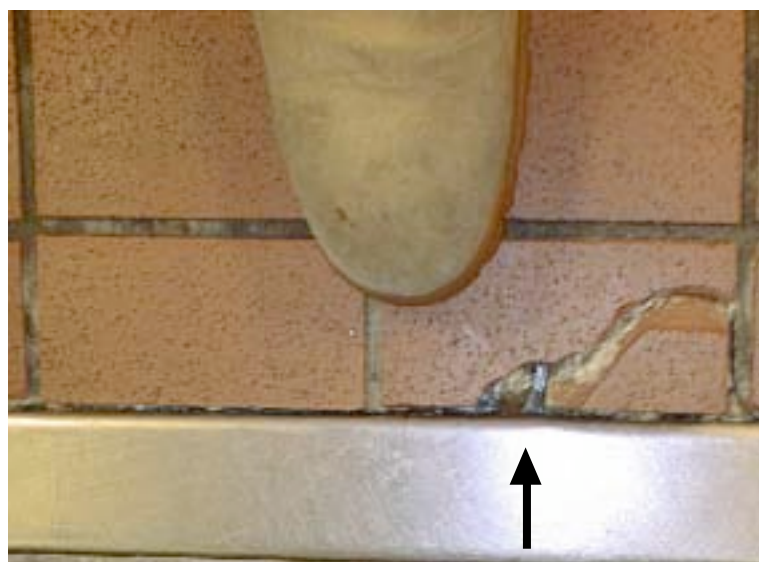

The problem was solved by **ADVANCED Polymer Repairs**. One row of tiles was removed and was replaced with a trowel applied concrete repair product in a matching color. A joint was left between the repair and the drain. This joint was then filled with a flexible joint sealer which adheres to the stainless steel drain and to the concrete repair allowing the drain to move without leaking. The leak was sealed permanently.

The assistant facility manager said that this drain had leaked since installed - 14 years.

**ADVANCED**  
Polymer Repairs  
856-691-7343

**On Budget. . . On Time . . . Every Time™**





